
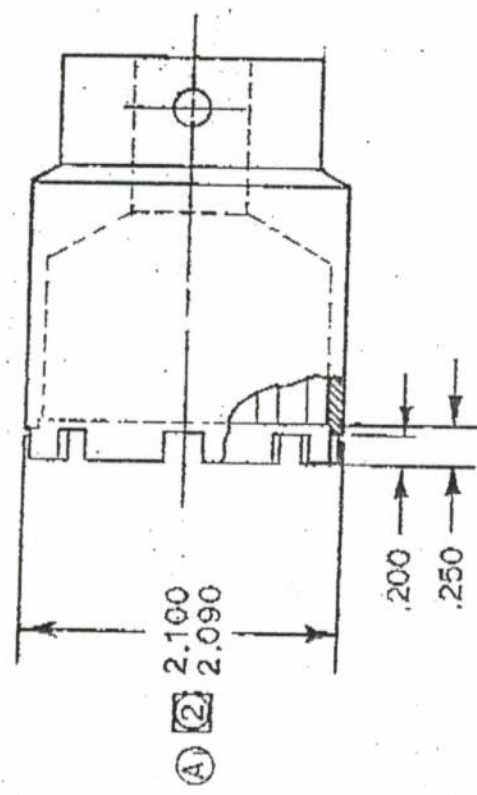


CHG. LTR.	AUTHORITY	DESCRIPTION	BY	CHECKED
A		1. CHANGED DIMS 280/270 WAS 260 ^{+0.003} / _{-0.003} & 2.100/2.090 WAS 2.093/2.083	BFM	4/17/89
B		2. ADDED G/N 3		
		CORRECTED DIM. C/D IN F/N 2 WAS 2.093-2.083	BFM	5/31/89

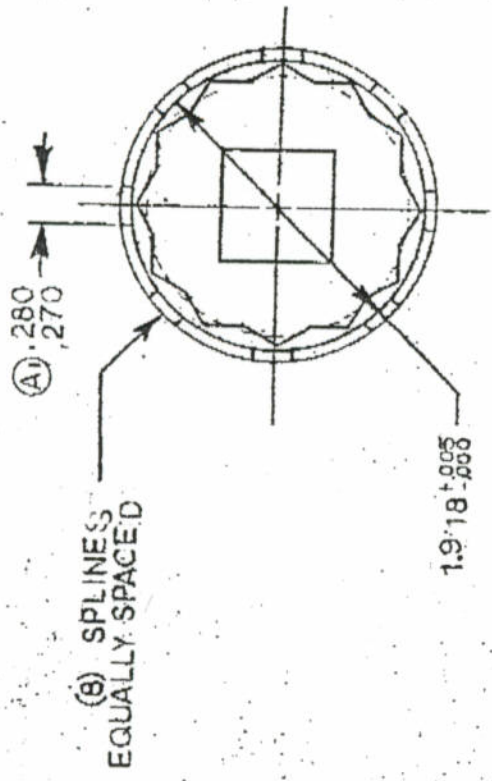

THIS PRINT WILL NOT
BE KEPT UP TO DATE

CONFIDENTIAL
Proprietary information of Schweizer Aircraft
All Reproduction, Classification and Disclosure
STRICTLY FORBIDDEN
without the express written permission of Schweizer Aircraft
All rights reserved by Schweizer Aircraft
Copyright Schweizer Aircraft (unpublished)

PART NUMBER		DESCRIPTION	DIA.	THICK	WID.	LG.	MATERIAL	HEAT TREAT	FINISH	ZONE
LIST OF MATERIAL										
NO. RECD.										
		DRAWN	NAME	DATE						
		CHECK	BMCherny	2/23/89						
		STRESS	SS 1/4	2/23/89						
UNLESS OTHERWISE SPECIFIED										
DIMENSIONS ARE IN INCHES										
TOLERANCES ARE										
DECIMALS										
.001 ± .03										
MACH. FORMED										
.0002 ± .010										
DO NOT SCALE PRINT										
APPLICATION										
MODEL	269A1221	DASH NO.	REQ'D A/C							
NEXT ASSY.										
SUPERSEDED BY: 1/1										
SCALE: 1/1										
SHEET 1 OF 1										

3. 269T1221 REPLACES 269A9320
2. 2.100-2.090 DIM. TO BE LARGEST O.D. OF SOCKET
1. MAY USE ANY 3/4" DRIVE 1 5/8" SOCKET THAT MEET DIMENSIONAL REQUIREMENTS.
- NOTES:

SCHWEIZER AIRCRAFT CORP.
ELMHRA, NEW YORK



SOCKET PITCH BEARING LOCKNUT MAIN ROTOR

DRAWING NO. 269T1221
REV. B

MAY 1 9 4002